
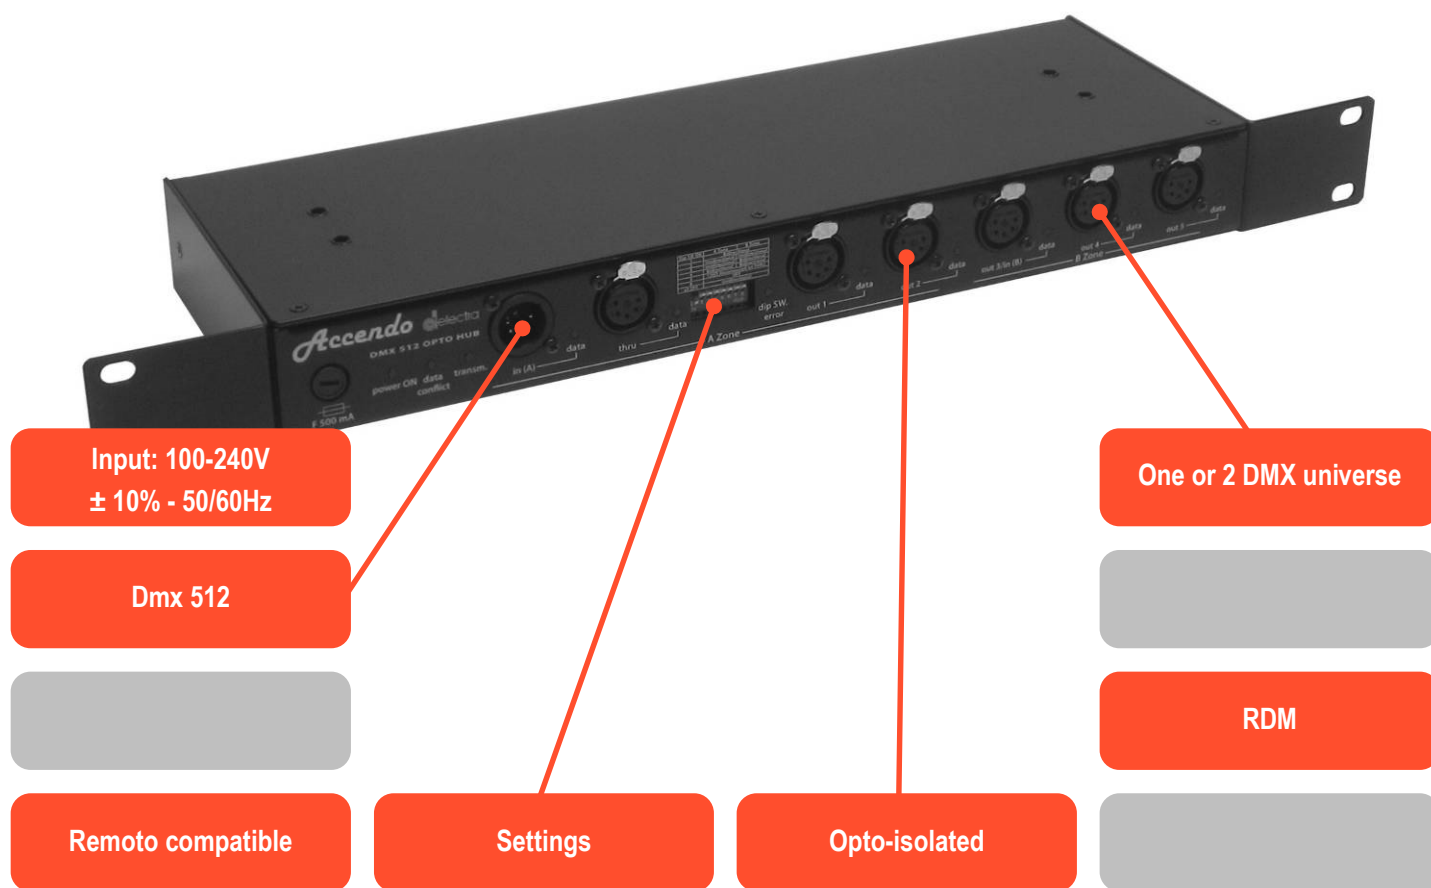


ACCENDO DMX 512 OPTO HUB

Splitter to separate 1 DMX 512 line in 5 opto-isolate output and 1 opto-isolate through. Bidirectional transmission protocol DMX512, DMX512A and RDM are all accepted. Accendo DMX 512 Opto Hub isolate, amplify and regenerate the DMX signal while allowing full two-way communication. Insulation voltage 2500 V, protect DMX lines amplifying it and regenerating it. Remoto compatible. Product warranty: 3 years.

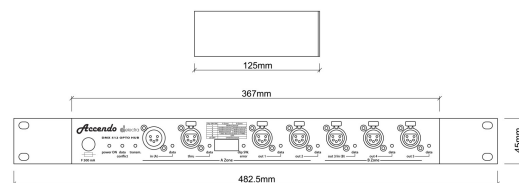

Main:

- 100-240 Vac +/-10% (autosensing)
- Frequency: 47/63Hz

Input/Output:

- DMX 512, DMX 512A, RDM
- Mode: PWM (Pulse Width Modulation)
- 1 or 2 universes

Protections:

- Main Fuse

Thermal:

- Working temperature: -20...+40°C
- Working humidity: 0-90% (non condensing)

Physical:

- Dimensions LxHxP: 482,5x45x125 (mm)
- 1 rack unit 19"
- Weight: 2500 (g)
- IP20